


Supermicrolib 2" Performances curve

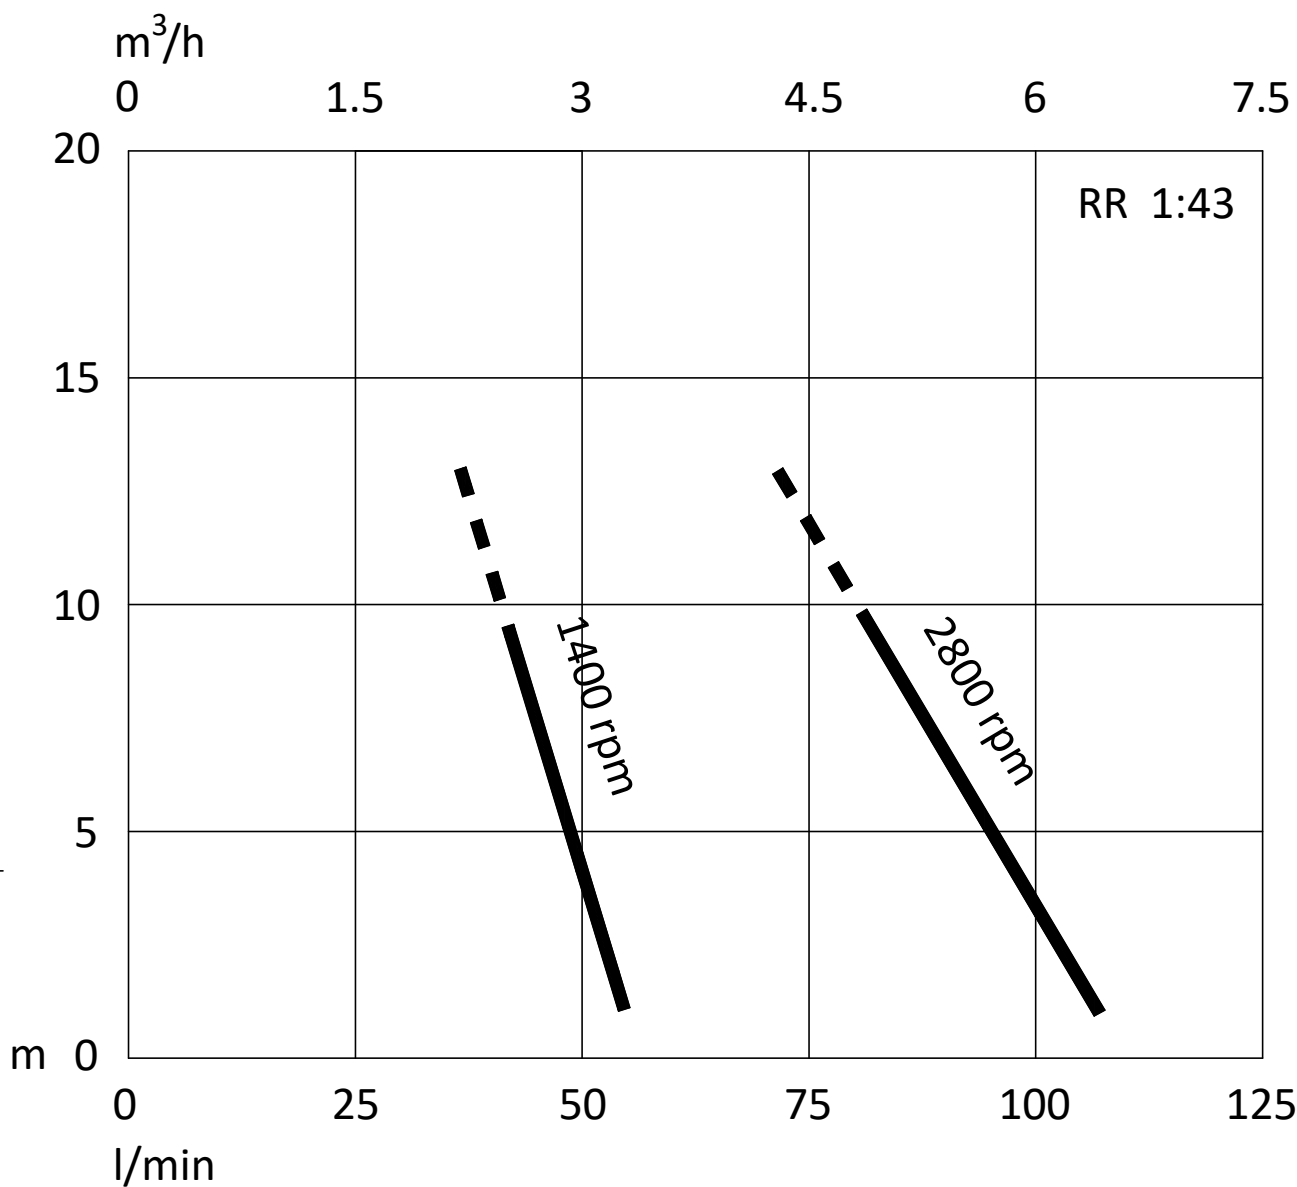

For industrial applications the total manometric head must not exceed 10m

En service continu et intense, la hauteur manométrique totale ne doit pas dépasser 10m

Per servizi continuativi la prevalenza manometrica totale non deve superare i 10m

DATE 04/07/2025		FINISHING -		DESCRIPTION Performances curve Supermicrolib 2" Reduction Ratio : 1:43 Speed : 1400 - 2800 rpm					
DRAWN BY G. Fortese		REQUIRED PROCESSING -							
VALIDATED BY G. Fortese		TREATMENT -							
MATERIAL -		NOTES -		Q.TY -	SCALE -	SHEET FORMAT A4	SHEET N° 1/1		
ELIMINATING SHARP EDGES, DEBURRING AND JOINTING									
				SUBSTITUTING DRAWING CODE: Curva_1-43					
0		Template update		04/07/2025		DRAWING CODE: Curve_SM_RR43_rpm1400-2800			
REV.		DESCRIPTION		DATE					
REPRODUCTION OR COMMUNICATION TO THIRD PARTIES WITHOUT OUR APPROVAL IS PROHIBITED BY LAW						SURFACE TEXTURES GEOMETRICAL TOLERANCES GENERAL TOLERANCES		ISO 1302 ISO 1101 ISO 2768 - mk	

REPRODUCTION OR COMMUNICATION TO THIRD PARTIES WITHOUT OUR APPROVAL IS PROHIBITED BY LAW

